



Platforms in Partnership with

©2020 Micron Technology, Inc. All rights reserved. Information, products, and/or specifications are subject to change without notice. All information is provided on an "AS IS" basis without warranties of any kind. Statements regarding products, including statements regarding product features, availability, functionality, or compatibility, are provided for informational purposes only and do not modify the warranty, if any, applicable to any product. Drawings may not be to scale. Micron, the Micron logo, and all other Micron trademarks are the property of Micron Technology, Inc. All other trademarks are the property of their respective owners.



Micron® Memory Support for Renesas® Platforms

2

		Internal	Micron External Memory												
			NOR		NAND						DRAM				
Micron Memory	Product	Flash Embedded in Renesas Controller	Serial NOR, Xccela™	Parallel NOR	SLC NAND	e.MMC	UFS	SSD	μSD/SD	eUSB	LPDDR4/4X	DDR4	DDR3/3L	DDR2	SDR SDRAM
	Family		MT35X, MT25T, MT25Q	MT28EW, MT29FW	MT29F	MTFC	MTFC	MTFD	MTSD	MTED	MT53	MT40	MT41	MT47	MT48
	Voltage		1.8V, 3.3V	3.3V	1.8V, 3.3V	3.3V	3.3V	3.3V, 5V	–	3.3V, 5V	VDD1: 1.8V VDD2: 1.1V VDDQ: 1.1V/0.6V	1.2V	1.35V, 1.5V	1.8V	3.3V
	Speed		50–200 MHz SDR/DDR	Async 70–105ns	ONFI 1.0/2.2	e.MMC 4.41, 4.51, 5.1	UFS 3.1	SATA 6 Gb/s PCIe Gen 3	Class 10 (UHS-I U1)	USB 2.0, 3.1	3200–4266 Mb/s	3200 Mb/s	1600–2133 Mb/s	800 Mb/s	133–167 MHz
	Width		x4, x8	x8, x16	x1, x2, x4 (SPI) x8 x16 (Parallel)	–	–	–	–	–	x32	x8, x16	x8, x16	x8, x16	x8, x16, x32
	Density		128Mb–2Gb	128Mb–2Gb	1Gb–256Gb	4GB–128GB	128GB–256GB	>64GB	>8GB	2GB–32GB	4Gb–64Gb	8Gb–16Gb	1Gb–8Gb	512Mb–2Gb	64Mb–256Mb
Renesas Products	System on Chips (SOCs) Aligned with Micron Memory														
	R-Car S4	–	✓			✓ e.MMC 5.0	✓	✓ (PCIe)	✓		✓ (3200 Mb/s, 32 bits)				
	R-Car H3, M3, E3, H3e, H3Ne, M3e, M3Ne, E3e	–	✓			✓ e.MMC 5.0		✓ (SATA)	✓	✓	✓ H3: 3200 Mb/s, 128 bits M3: 3200 Mb/s, 64 bits		✓ E3: 1866 Mb/s, 32 bits		
	R-Car H2, M2, E2	–	✓ MT25T, MT25Q	✓	✓	✓ e.MMC 4.41		✓ H2, M2: SATA 2ch	✓	✓ H2, M2: 4 ports, E2: 2 ports			✓ 1600 Mb/s, H2, M2: 32 bits x 2ch E2: 32 bits x 1ch		
	R-Car V3U		✓ 2ch: MT25Q, 1ch: MT35X, MT25T			✓ e.MMC 5.0					✓ 4266 Mb/s, 128 bits				
	R-Car V3H2, V3H, V3M	–	✓ 2ch: MT25Q, 1ch: MT35X, MT25T			✓ V3M: e.MMC 4.51, V3H: e.MMC 5.0					✓ V3H: 3200 Mb/s, 32 bits		✓ V3M: 1600 Mb/s, 32 bits		
	R-CAR V2H	–	✓ MT25T, MT25Q	✓	✓	✓ e.MMC 4.41			✓				✓ 1600 Mb/s, 32 bits x 1ch		
	R-Car D3, D3e	–	✓ 2ch: MT25Q, 1ch: MT35X, MT25T		✓	✓							✓ 1866 Mb/s, 16 bits x 1ch		
R-Car D1	–	✓		✓	✓ (e.MMC 4.41)				✓			✓			
*For additional details, please contact your local Micron sales representative.															

*For additional details, please contact your local Micron sales representative.

[micron.com](https://www.micron.com)

Products are warranted only to meet Micron's product data sheet specifications. Products, programs, and specifications are subject to change without notice. Dates are estimates only. ©2019 Micron Technology, Inc. All rights reserved. Micron and the Micron logo are trademarks of Micron Technology, Inc. Renesas is a registered trademark of Renesas Electronics Corporation. All other trademarks are the property of their respective owners. All information herein is provided on an "AS IS" basis without warranties of any kind. Rev. 12/2021 CCMMD-676576390-10311

RENESAS



Micron® Memory Support for Renesas® Platforms

3

		Internal	External Memory												
			NOR		NAND					DRAM					
Micron Memory	Product	Flash Embedded in Renesas Controller	Serial NOR, Xccela™	Parallel NOR	SLC NAND	e.MMC	UFS	SSD	µSD/SD	eUSB	LPDDR4/4X	DDR4	DDR3/3L	DDR2	SDR SDRAM
	Family		MT35X, MT25T, MT25Q	MT28EW, MT29FW	MT29F	MTFC	MTFC	MTFD	MTSD	MTED	MT53	MT40	MT41	MT47	MT48
	Voltage		1.8V, 3.3V	3.3V	1.8V, 3.3V	3.3V	3.3V	3.3V, 5V	–	3.3V, 5V	VDD1: 1.8V VDD2: 1.1V VDDQ: 1.1V/0.6V	1.2V	1.35V, 1.5V	1.8V	3.3V
	Speed		50–200 MHz SDR/DDR	Async 70–105ns	ONFI 1.0/2.2	e.MMC 4.41, 4.51, 5.1	UFS 3.1	SATA 6 Gb/s PCIe Gen 3	Class 10 (UHS-I U1)	USB 2.0, 3.1	3200-4266 Mb/s	3200 Mb/s	1600–2133 Mb/s	800 Mb/s	133–167 MHz
	Width		x4, x8	x8, x16	x1, x2, x4 (SPI) x8 x16 (Parallel)	–	–	–	–	–	x32	x8, x16	x8, x16	x8, x16	x8, x16, x32
	Density		128Mb–2Gb	128Mb–2Gb	1Gb–256Gb	4GB–128GB	128GB–256GB	>64GB	>8GB	2GB–32GB	4Gb–64Gb	8Gb–16Gb	1Gb–8Gb	512Mb–2Gb	64Mb–256Mb
Renesas Products	Microcontrollers (MCUs) for Automotive Aligned with Micron Memory														
	RH850/ D1Mx, D1Lx	5MB MAX (code) + 8KB (data)	✓ D1L1: x4 SDR (40 MHz) D1L2: x4 SDR (120 MHz)/ DTR (80 MHz) D1Mx, D1L2H: x8 SDR (120 MHz)/ DTR (80 MHz)										✓ D1M2: 240 MHz, x16/ D1M2H: 240 MHz, x32	✓ D1M1H: 80 MHz, x32	
	RH850/ U2A16	16MB max. (code) + 512KB (data)				✓									
*For additional details, please contact your local Micron sales representative.															

*For additional details, please contact your local Micron sales representative.

[micron.com](https://www.micron.com)

Products are warranted only to meet Micron's product data sheet specifications. Products, programs, and specifications are subject to change without notice. Dates are estimates only. ©2019 Micron Technology, Inc. All rights reserved. Micron and the Micron logo are trademarks of Micron Technology, Inc. Renesas is a registered trademark of Renesas Electronics Corporation. All other trademarks are the property of their respective owners. All information herein is provided on an "AS IS" basis without warranties of any kind. Rev. 12/2021 CCMMD-676576390-10311



Micron® Memory Support for Renesas® Platforms

4

		Internal	External Memory												
			NOR		NAND						DRAM				
Micron Memory	Product	Flash Embedded in Renesas Controller	Serial NOR, Xccela™	Parallel NOR	SLC NAND	e.MMC	UFS	SSD	µSD/SD	eUSB	LPDDR4/4X	DDR4	DDR3/3L	DDR2	SDR SDRAM
	Family		MT35X, MT25T, MT25Q	MT28EW, MT29FW	MT29F	MTFC	MTFC	MTFD	MTSD	MTED	MT53	MT40	MT41	MT47	MT48
	Voltage		1.8V, 3.3V	3.3V	1.8V, 3.3V	3.3V	3.3V	3.3V, 5V	–	3.3V, 5V	VDD1: 1.8V VDD2: 1.1V VDDQ: 1.1V/0.6V	1.2V	1.35V, 1.5V	1.8V	3.3V
	Speed		50–200 MHz SDR/DDR	Async 70–105ns	ONFI 1.0/2.2	e.MMC 4.41, 4.51, 5.1	UFS 2.1, UFS 3.1	SATA 6 Gb/s	Class 10 (UHS-I U1)	USB 2.0, 3.1	3200-4266 Mb/s	3200 Mb/s	1600–2133 Mb/s	800 Mb/s	133–167 MHz
	Width		x4, x8	x8, x16	x1, x2, x4 (SPI) x8 x16 (Parallel)	–	–	–	–	–	x32	x8, x16	x8, x16	x8, x16	x8, x16, x32
	Density		128Mb–2Gb	128Mb–2Gb	1Gb–256Gb	2GB–128GB	32GB–256GB	>64GB	>8GB	2GB–32GB	4Gb–64Gb	8Gb–16Gb	1Gb–8Gb	512Mb–2Gb	64Mb–256Mb
Renesas Products	Microprocessors (MPUs) Aligned with Micron Memory														
	RZ/V2M, V2L	–	✓ V2L: Xccela 100 MHz QSPI SDR/DDR 66/50 MHz			✓ e.MMC 4.51			✓	✓	✓ (V2M: 3200 Mb/s, x32 1ch)	✓ (V2L: 1600 Mb/s, x16 1ch)	✓ (V2L: 1600 Mb/s, x16 1ch)		
	RZ/A2M	–	✓ Xccela: 132 MHz QSPI: x1, 55 MHz		✓	✓ e.MMC 4.51			✓	✓					✓
	RZ/A1H, A1M, A1LU, A1LC, A1L	–	✓ A1H, A1M: QSPI SDR 50 MHz, 1/2ch A1LU, A1L: QSPI SDR 66 MHz 1ch	✓	✓	✓ e.MMC 4.41			✓	✓					✓
	RZ/G2H, G2M, G2N, G2E	–	✓ G2H,M,N: QSPI DDR 160 MHz MAX x4/x8 G2E: QSPI DDR 150/160 MHz MAX x4/x8			✓ e.MMC 5.0, HS400		✓ G2H, G2N: SATA Gen3	✓	✓	✓ G2H: 3200 Mb/s x32 x 1ch G2M: 3200 Mb/s x32 x 2ch G2N: 3200 Mb/s x32 x 4ch		✓ G2E: 1856 Mb/s x32 x 1ch		
	RZ/G2L, G2LC, G2UL	–	✓ G2L: QSPI, 50 MHz DDR, 66 MHz SDR, 100 MHz x8 G2LC: QSPI, 50 MHz DDR/66MHz SDR, 1ch			✓ e.MMC 4.51			✓	✓		✓ 1600 Mb/s x16 x 1ch	✓ 1333 Mb/s x16 x 1ch		
*For additional details, please contact your local Micron sales representative.															

*For additional details, please contact your local Micron sales representative.

[micron.com](https://www.micron.com)

Products are warranted only to meet Micron's product data sheet specifications. Products, programs, and specifications are subject to change without notice. Dates are estimates only. ©2019 Micron Technology, Inc. All rights reserved. Micron and the Micron logo are trademarks of Micron Technology, Inc. Renesas is a registered trademark of Renesas Electronics Corporation. All other trademarks are the property of their respective owners. All information herein is provided on an "AS IS" basis without warranties of any kind. Rev. 12/2021 CCMMD-676576390-10311

RENESAS

Micron

Micron® Memory Support for Renesas® Platforms

5

		Internal	External Memory												
Micron Memory	Flash Embedded in Renesas Controller	NOR		NAND						DRAM					
		Serial NOR, Xccela™	Parallel NOR	SLC NAND	e.MMC	UFS	SSD	µSD/SD	eUSB	LPDDR4/4X	DDR4	DDR3/3L	DDR2	SDR SDRAM	
		MT35X, MT25T, MT25Q	MT28EW, MT29FW	MT29F	MTFC	MTFC	MTFD	MTSD	MTED	MT53	MT40	MT41	MT47	MT48	
		1.8V, 3.3V	3.3V	1.8V, 3.3V	3.3V	3.3V	3.3V, 5V	–	3.3V, 5V	VDD1: 1.8V VDD2: 1.1V VDDQ: 1.1V/0.6V	1.2V	1.35V, 1.5V	1.8V	3.3V	
		50–200 MHz SDR/DDR	Async 70–105ns	ONFI 1.0/2.2	e.MMC 4.41, 4.51, 5.1	UFS 2.1, UFS 3.1	SATA 6 Gb/s	Class 10 (UHS-I U1)	USB 2.0, 3.1	3200-4266 Mb/s	3200 Mb/s	1600–2133 Mb/s	800 Mb/s	133–167 MHz	
		x4, x8	x8, x16	x1, x2, x4 (SPI) x8 x16 (Parallel)	–	–	–	–	–	x32	x8, x16	x8, x16	x8, x16	x8, x16, x32	
		128Mb–2Gb	128Mb–2Gb	1Gb–256Gb	2GB–128GB	32GB–256GB	>64GB	>8GB	2GB–32GB	4Gb–64Gb	8Gb–16Gb	1Gb–8Gb	512Mb–2Gb	64Mb–256Mb	
Renesas Products	Microprocessors (MPUs) Aligned with Micron Memory														
	RZ/G1H, G1M, G1N, G1E	–	✓ QSPI SDR 48.75 MHz MAX, 1ch	✓	✓ e.MMC 4.41		✓ G1H, G1M, G1N: SATA Gen3	✓	✓			✓ DDR3: G1H: 1600Mb/s x32 x 2ch G1E: 1333Mb/s x32 x 1ch DDR3L: G1M: 1600Mb/s x32 x 2ch G1N: 1600Mb/s x32 x 1ch			
	RZ/T1, T1-M	–	✓	✓					✓					✓ T1: 32-bit bus	
	RZ/N1D, N1S, N1L	–	✓ MT25Q		✓			✓	✓			✓ N1D only	✓ N1D only		
	Microcontrollers (MCUs) Aligned with Micron Memory														
	RX700, RX600	4MB MAX code + 64KB data	✓ QSPI, SDR 60 MHz		✓ e.MMC 4.51			✓	✓					✓ 60 MHz MAX 80MHz for RX72M, x8/x16/x32	
	RX200, RX100	1MB MAX code + 8KB MAX data	No external memory interface (except eUSB for RX111/113/230/231)												
R-IN32M3, M4	–	✓ x1/x2/x4, SDR, 50 MHz	✓												
*For additional details, please contact your local Micron sales representative.															

*For additional details, please contact your local Micron sales representative.

[micron.com](https://www.micron.com)

Products are warranted only to meet Micron's product data sheet specifications. Products, programs, and specifications are subject to change without notice. Dates are estimates only. ©2019 Micron Technology, Inc. All rights reserved. Micron and the Micron logo are trademarks of Micron Technology, Inc. Renesas is a registered trademark of Renesas Electronics Corporation. All other trademarks are the property of their respective owners. All information herein is provided on an "AS IS" basis without warranties of any kind. Rev. 12/2021 CCMMID-676576390-10311



Micron® Memory Support for Renesas® Platforms

6

			Internal	External Memory											
			NOR		NAND					DRAM					
Micron Memory	Product	Flash Embedded in Renesas Controller	Serial NOR, Xccela™	Parallel NOR	SLC NAND	e.MMC	UFS	SSD	μSD/SD	eUSB	LPDDR4/4X	DDR4	DDR3/3L	DDR2	SDR SDRAM
	Family		MT35X, MT25T, MT25Q	MT28EW, MT29FW	MT29F	MTFC	MTFC	MTFD	MTSD	MTED	MT53	MT40	MT41	MT47	MT48
	Voltage		1.8V, 3.3V	3.3V	1.8V, 3.3V	3.3V	3.3V	3.3V, 5V	–	3.3V, 5V	VDD1: 1.8V VDD2: 1.1V VDDQ: 1.1V/0.6V	1.2V	1.35V, 1.5V	1.8V	3.3V
	Speed		50–200 MHz SDR/DDR	Async 70–105ns	ONFI 1.0/2.2	e.MMC 4.41, 4.51, 5.1	UFS 2.1, UFS 3.1	SATA 6 Gb/s	Class 10 (UHS-I U1)	USB 2.0, 3.1	3200-4266 Mb/s	3200 Mb/s	1600–2133 Mb/s	800 Mb/s	133–167 MHz
	Width		x4, x8	x8, x16	x1, x2, x4 (SPI) x8 x16 (Parallel)	–	–	–	–	–	x32	x8, x16	x8, x16	x8, x16	x8, x16, x32
	Density		128Mb–2Gb	128Mb–2Gb	1Gb–256Gb	2GB–128GB	32GB–256GB	>64GB	>8GB	2GB–32GB	4Gb–64Gb	8Gb–16Gb	1Gb–8Gb	512Mb–2Gb	64Mb–256Mb
Renesas Products	Microcontrollers (MCUs) Aligned with Micron Memory														
	S7G2	4MB + 64KB	✔ QSPI			✔ e.MMC 4.51			✔	✔					✔ 60/120 MHz
	S5D3, S5D5, S5D9	2MB MAX code + 64KB MAX data	✔ QSPI			✔ e.MMC 4.51			✔	✔					
	S3A1, S3A3, S3A6, S3A7	1MB MAX code + 16KB MAX data	✔ QSPI			✔ e.MMC 4.51			✔	✔					
	S124, S128, S1JA	256KB MAX code + 8KB MAX data	✔ QSPI							✔					
	RE01-1500KB, RE01-256K	1.5MB MAX code	✔ QSPI							✔ 1500KB					
RA2, RA4, RA6, RA8	1MB MAX code + 64KB MAX data	✔ QSPI/Xccela			✔ RA6: eMMC 4.51			✔	✔						
*For additional details, please contact your local Micron sales representative.															


*For additional details, please contact your local Micron sales representative.

[micron.com](https://www.micron.com)

Products are warranted only to meet Micron's product data sheet specifications. Products, programs, and specifications are subject to change without notice. Dates are estimates only. ©2019 Micron Technology, Inc. All rights reserved. Micron and the Micron logo are trademarks of Micron Technology, Inc. Renesas is a registered trademark of Renesas Electronics Corporation. All other trademarks are the property of their respective owners. All information herein is provided on an "AS IS" basis without warranties of any kind. Rev. 12/2021 CCMMD-676576390-10311




RZ/G2E Board – Top Side

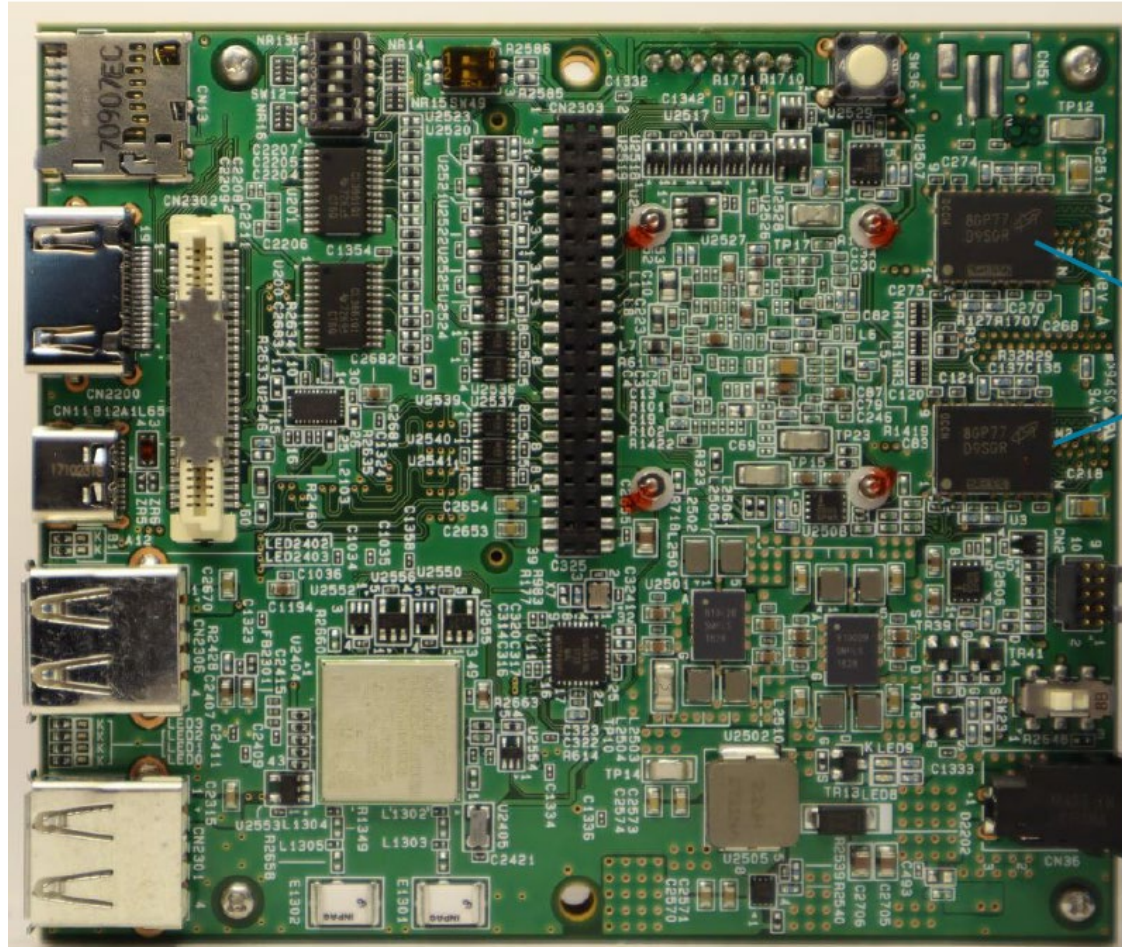


2GB total
Qty 4
4Gb DDR3
components

Synergy AE-CLOUD1 Platform

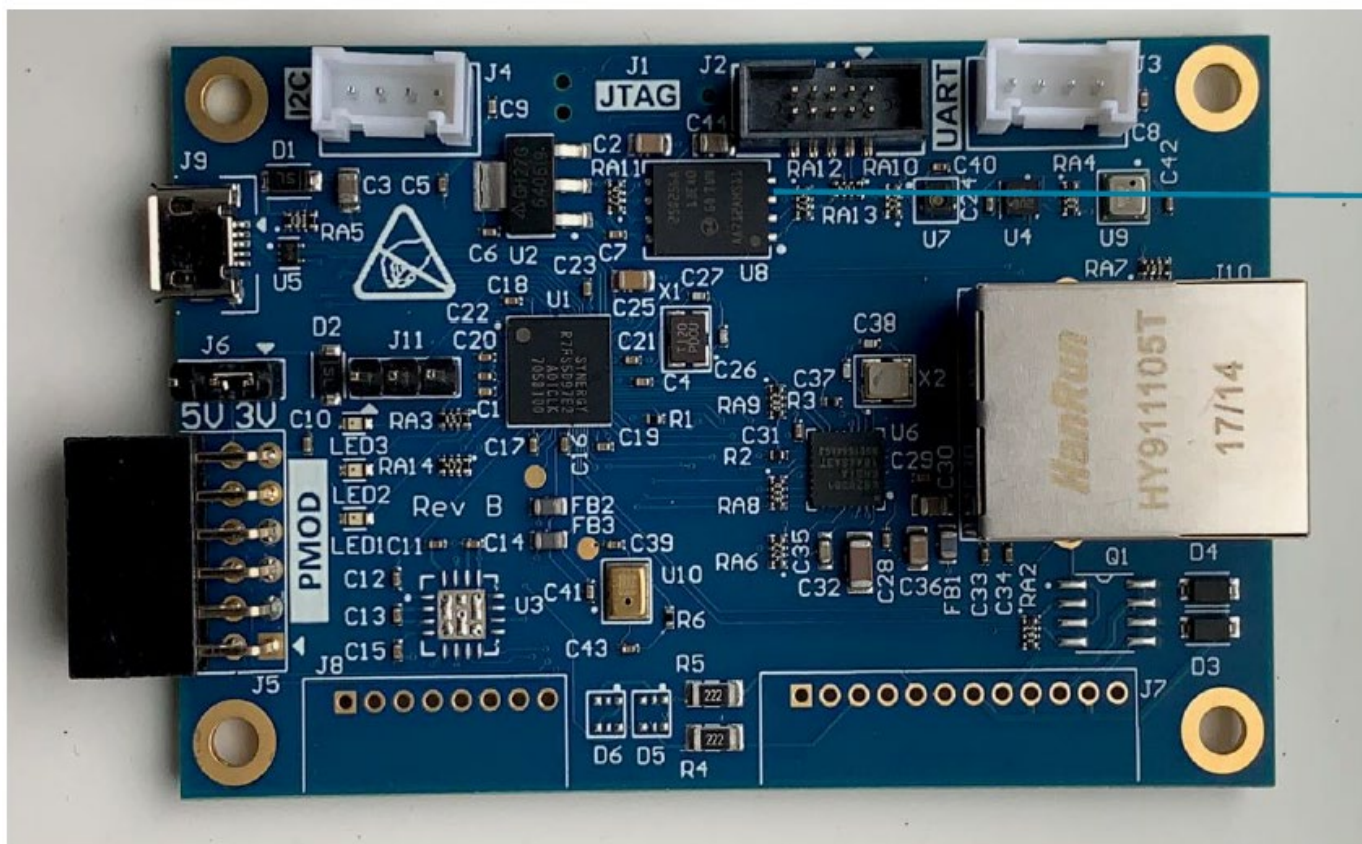

256Mb
Quad SPI
NOR


RZ/G2N Board

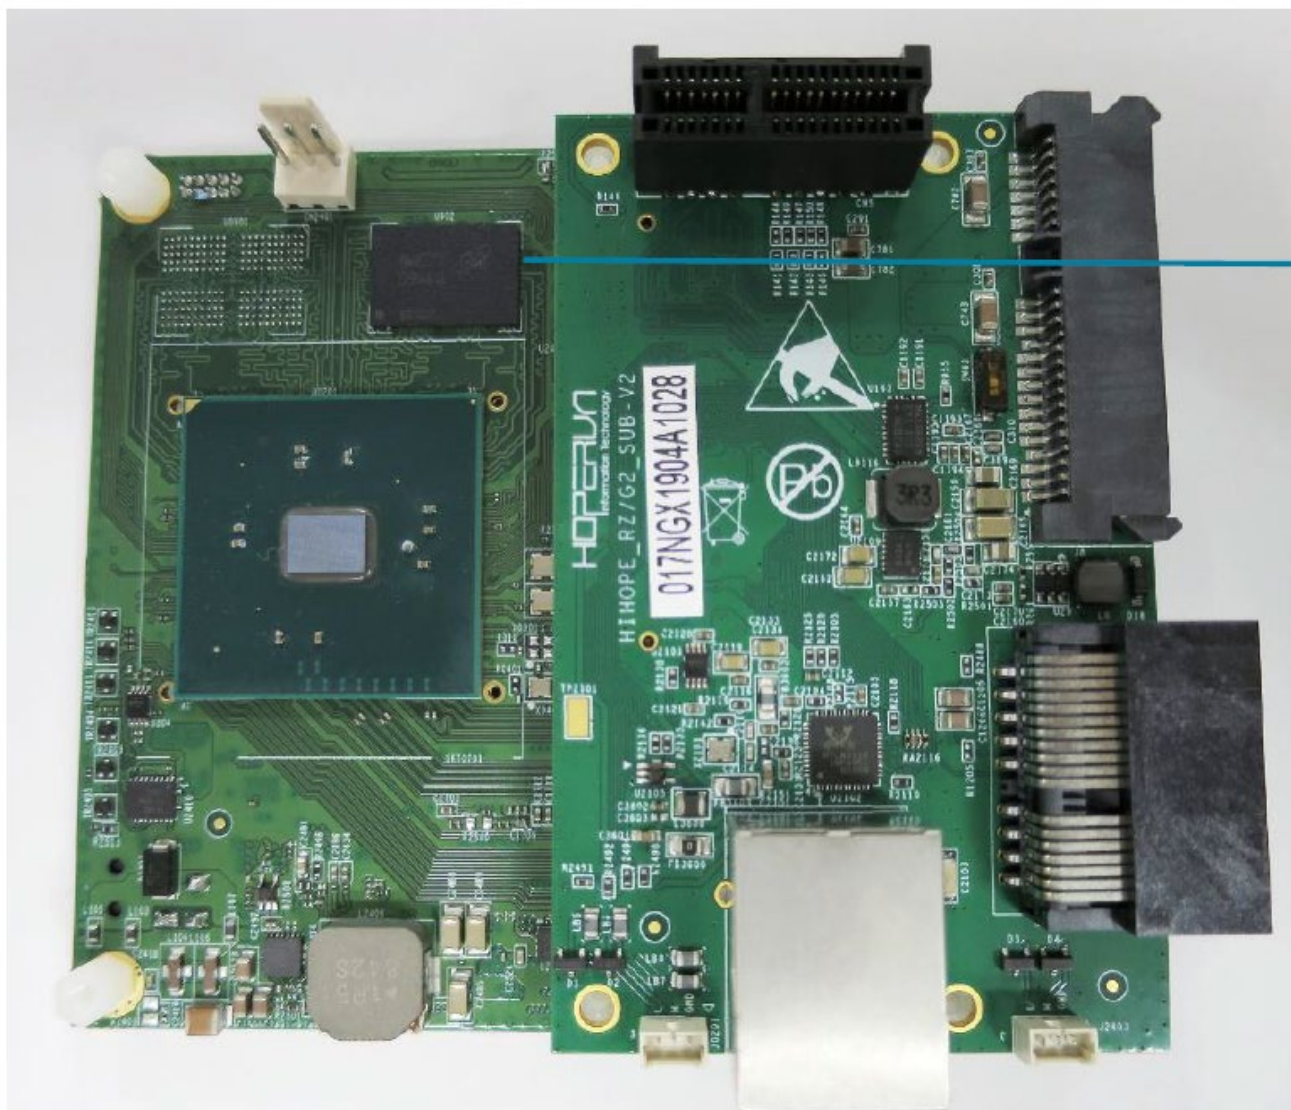


32GB
LPDDR4

RZ/V2L EVK Board – Top Side

16Gb
DDR4

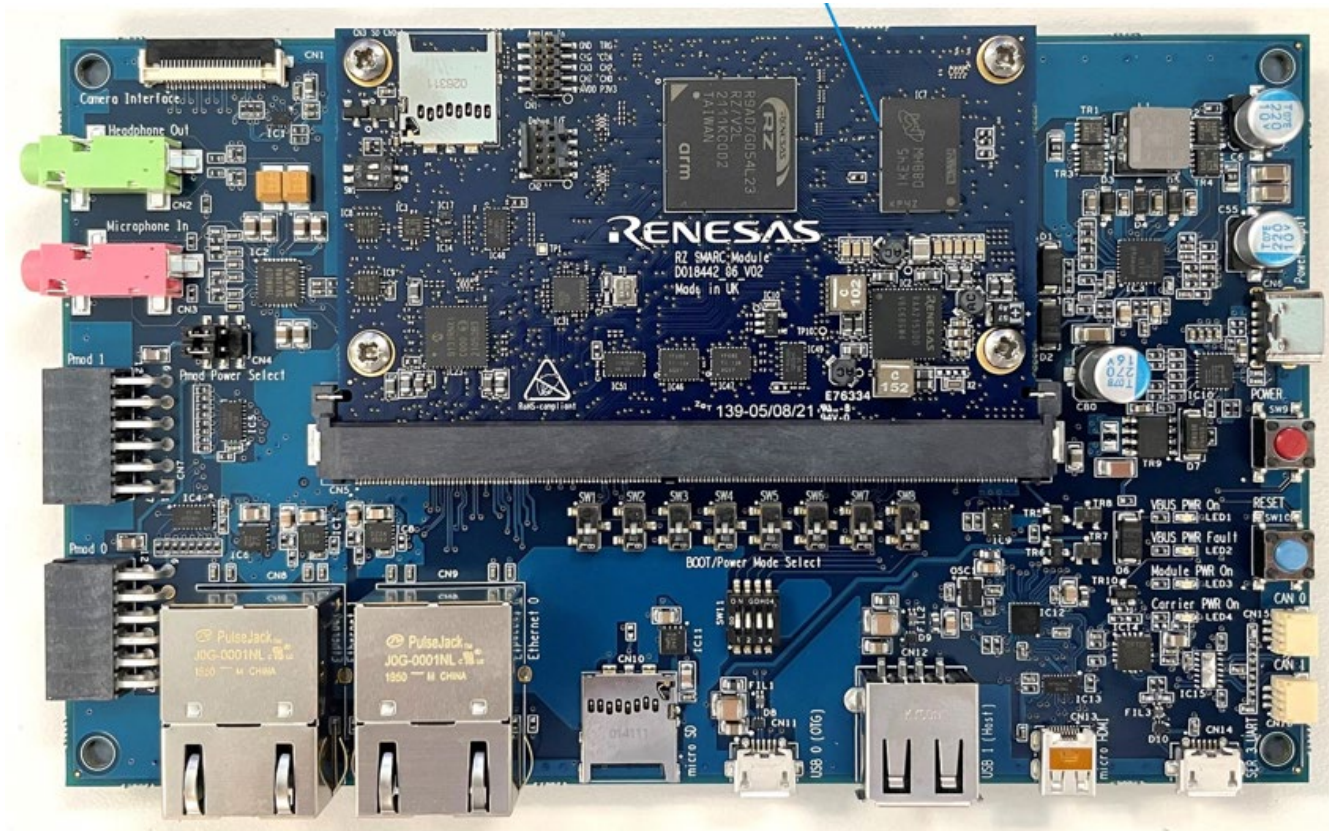

RZ/G2L Board – Top Side

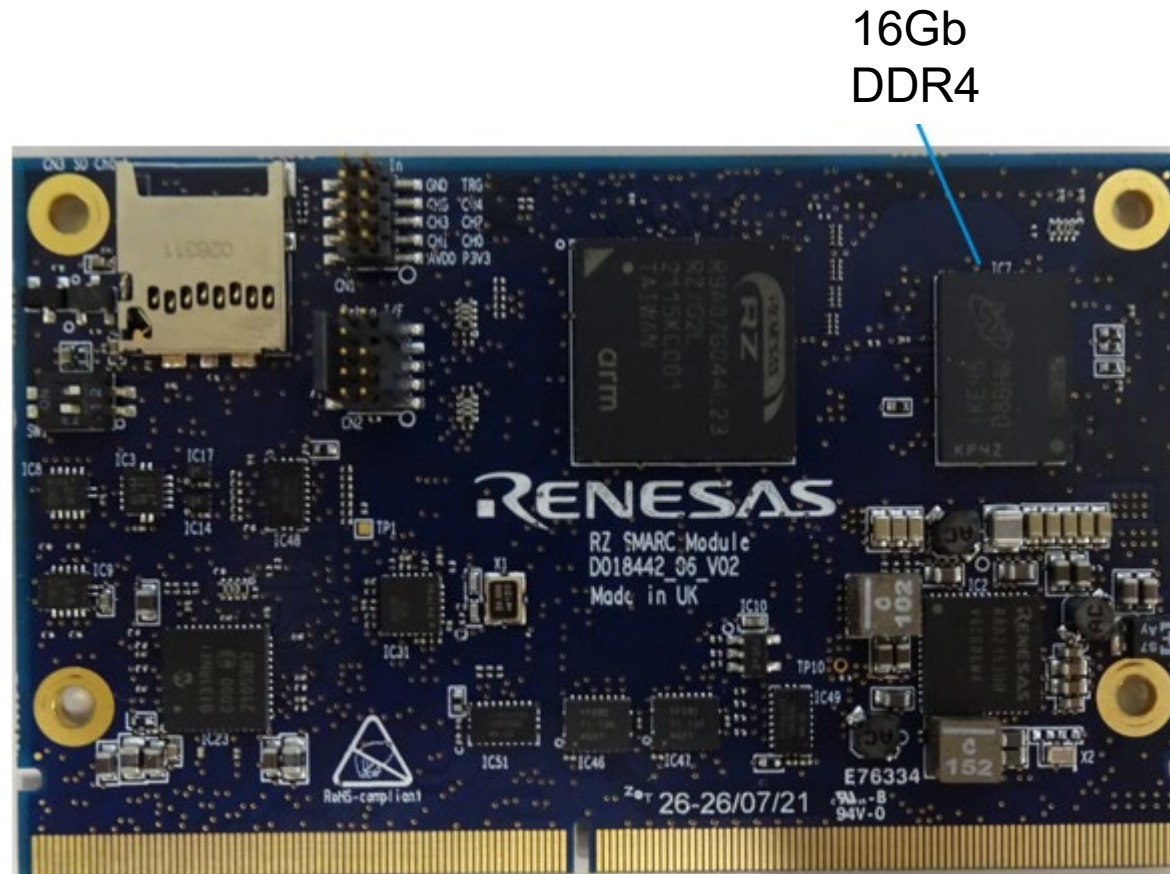

RZ/G2L Board – Bottom Side

512Mb
Quad SPI NOR

64GB
e.MMC



